IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com

MACHINE MODEL

GBS 218

Manual band saw for small production

Short description


GBS 218 is the IMET manual sawing machine: versatile and easy to use, GBS 218 is ideal for small and medium mechanical series production and for small and medium carpentry. The machine makes angled cuts up to 60 ° to the left. sinistra



Cutting capacity at 0 °	Round: 220mm - Square: 210mm - Rectangle: 230x185mm5mm
Cutting capacity at 45 ° left	Round: 150mm - Square: 150mm - Rectangle: 150x210mm0mm
Cutting capacity at 60 ° left	Round: 90mm - Square: 90mm - Rectangle: 90x100mm0mm
Cutting capacity at 0 ° for full (C45))	150mm
Blade size	2455x27x0,9mm - 6/10 T
Blade motor	1.2 KW
Blade speed	35/70 m/min
Height of the work surfaceo	900mm
Weight	240kg
Dimensions	680x1400x1800mm

IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com

Features

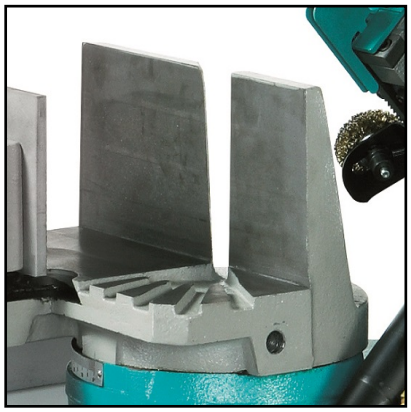

Wide working area

GBS 218 has a wide working area with rotation integral with the bow designed to avoid incisions of the same, on ball bearing for easy rotation.



Vice

The vice with adjustable guides, sliding transversely on the work surface and quick approach to the cutting material.



Blade

Bimetal blade dimensions 2455x27x0.9mm with a speed of use between 30 and 70 meters per minute making it the ideal tool for mprocessing steel and cast iron.



WS Bar Support (Optional) OPTIONAL


Support element adjustable in height from 710 to 1100mm. Width 260mm, max capacity 150 kg

IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com



Connection for loading table (Optional) OPTIONAL

Connecting element for roller table for the loading side.

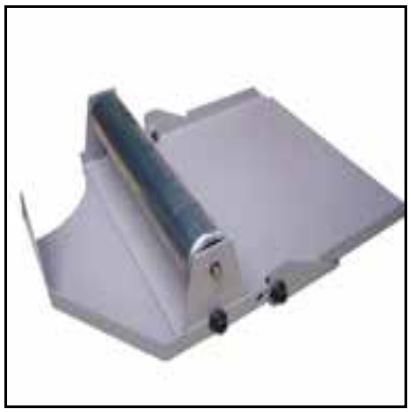

Connection for unloading table (Optional) OPTIONAL

Connecting element for roller table for the unloading side.



Loading/unloading table (Optional) OPTIONAL

Loading /unloading table 1st element , 2 m long , max capacity 700 kg.



Loading /unloading table (Optional) OPTIONAL

Loading/unloading table, following element 2 m long, max capacity 600 kg.

IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com



Unloading table (Optional) OPTIONAL

Unloading roller table with metric rod and length stop, 1st element , 2 m long, max capacity 700 kg .



Unloading roller table (Optional) OPTIONAL

Unloading roller table with metric rod and length stop , following element , 2 m long , max capacity 600 kg .



Pair of containment rollers (Optional) OPTIONAL

Containment element in steel. Maximum 2 pairs. Single 2m element. To be used without roller cover, only for RTS.